



Li-ion Order Picker




HIGHLIGHTS

- ▶ PMSM Drive Motors - maintenance free with high-efficiency
- ▶ DC Pump and Steering Units - extended service life with minimal maintenance
- ▶ Lithium battery: 24V/150Ah
- ▶ Max. platform height 4600 mm/181.1 inches
- ▶ Max. work height 6600 mm/259.8 inches
- ▶ Loading capacity 317 kg/700 lbs
 - 90 kg / 200 lbs back load tray
 - 100 kg / 200 lbs front load tray
 - 127 kg / 300 lbs operator platform
- ▶ Drive units with suspension system for improved stability, safety and operator comfort
- ▶ Keyless Pin-Code Panel with RFID Card support
- ▶ Electric Lifting and Lowering Buttons
- ▶ High-performance control handles with dual-hands sensing operation
- ▶ LCD display: speed, steering mode, usage time, power, steering, fault code, and more
- ▶ Meets EU and US regulations

HERO OVS-010

Capacity: 327 kg / 700 lbs.
Li-ion Order Picker

The Lithium-ion HERO order picker is a compact, highly maneuverable industrial vehicle designed to help workers perform a variety of tasks in warehouses, distribution centers, and retail settings. Filling the gap between ladders, order pickers, tuggers and forklifts, it gives operators a safer and more efficient way to handle light material handling and elevated work tasks. Four steering modes allow the HERO to move like no other industrial vehicle, including side to side Crab Mode, true Zero Point Turning, and even at angles while elevated - offering unmatched precision and efficiency in order picking environments or tight spaces. Engineered with a low profile, it can easily enter elevators and pass under doorways.



SIMULTANEOUS LIFTING, STEERING AND DRIVING



Forward, Backward, Crab Mode
and true 360° Zero Point Turning



APPLICATIONS

Order Picking | Inventory Restocking
Order Fulfillment | Load Transport
Manufacturing and Assembly
Equipment Inspection | Facility Maintenance

UNIQUE STEERING MODES



N1 - Normal Front Steering: Front wheel steering. For long distances. Available for full range of lift heights with automatic speed reduction depending upon height.




N2 - Normal Rear Steering: Rear wheel steering. For highly maneuverable confined areas. Available for full range of lift heights with automatic speed reduction depending upon height.



C MODE - Crab Mode: Both steering wheels are turning in the same direction. For parallel shifting and pure side motion. Available for platform heights up to 118 inches with automatic speed reduction depending upon height.



Z MODE - Zero Point Turning: Both steering wheels are turning in opposite directions, providing true zero point turning. Available for platform heights up to 118 inches with automatic speed reduction depending upon height.

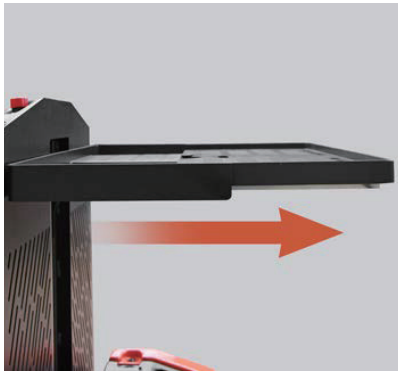

Telescopic load tray extends from 345 to 525mm (13.6 to 20.7 in) to increase carry volume while maintaining an unobstructed view for the operator.



Easily check condition and troubleshoot with CAN-bus technology.



Storage areas for small objects, packing film, documents and pick tickets.

A USB connector for charging and powering external devices.

B Lifting and lowering button for tray table control.

C Power on/off start button.

D LED side lights.

E Dual-hand sensing high-performance control handles.

F Color LCD display with full status indication.

G PIN code access lock with RFID cards support.

H Four steering mode buttons.

I Telescopic load tray extends for larger items.

J Emergency power button for operator protection.

K Speed control toggle button.

L Cigarette power socket for powering external devices.



INTELLIGENT. SAFE. RELIABLE.




LED side lights provide visibility in poor lighting conditions.



Equipped with LED blue safety light for pedestrian protection.




Flashing LED beacon alerts pedestrians during operation.

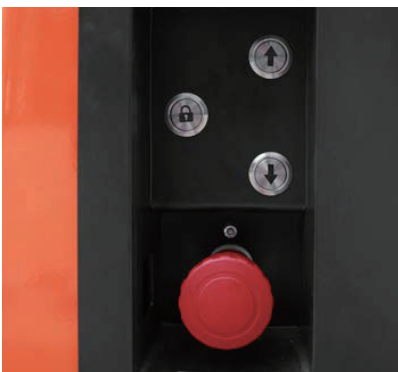

Additional lift/lower function from the side of the vehicle.

OPTIONAL

- ▶ Hooks for long, light weight object transportation.



- ▶ Towing connector for pulling carts, trailers or dollies.



FAST-CHARGING AND SAFE LITHIUM POWER



Fast-charging maintenance-free Lithium battery can be opportunity charged during user breaks and during shift changes which allows the truck to run continuously through multi-shift operations. No battery changes are necessary.

Lithium battery integrated charger 24V30A*

*25A max with 110V input, 30A max with 120V - 240V input

NOBLELIFT uses Lithium-Iron Phosphate batteries, the longest lasting and safest lithium battery available. Our lithium batteries are equipped with a Battery Management System (BMS), thermal management system, and an automotive-grade DC high-voltage control system. BMS manages charging and discharging data to ensure safety throughout its life cycle.





Max working height:
6600mm/259.8in

Max platform height:
4600mm/181.1in

ADDITIONAL FEATURES

- ▶ Automatic speed reduction and lift height restrictions depending upon height and steering mode
- ▶ Automatic return to neutral steering angle
- ▶ Soft lowering/lifting stop
- ▶ PPE (fall) connection point
- ▶ Gate interlocks prevent operation until latched
- ▶ Chassis tilt protection with restricted operation
- ▶ Safety sensors below the platform disable raise, lower and travel if someone or something is detected below the platform.
- ▶ Chain slack detection function improves safety and prolongs vehicle life
- ▶ Imperial or metric measuring units on LCD display

General. Weight

1.2	Model		OVS-010
1.3	Drive		Electric
1.4	Type of Operation		Task Support Vehicle
1.5	Load capacity, front load tray	kg / lb	100 220 / 200
1.6	Load capacity, back load tray	kg / lb	90 200
1.7	Load capacity, operator platform	kg / lb	127 280 / 300
1.8	Vehicle weight (with battery)	kg / lb	1350 2976
1.9	Axle loading, laden front / rear	kg / lb	757 / 820 1669 / 1808
1.10	Axle loading, unladen front / rear	kg / lb	585 / 765 1290 / 1686

Tires, Dimensions

2.0	Tires		polyurethane
2.1	Tire size, drive	mm / in	230 x 70 9.1 x 2.8
2.2	Tire size, side	mm / in	150 x 48 5.9 x 1.9
2.3	Wheels, number drive / side (x=driven wheels)		2x/4
2.4	Tread, front	b ₁₁ (mm / in)	664 26.1
2.5	Wheelbase	y (mm / in)	1134 44.7
2.6	Vehicle length	l ₁ (mm / in)	1460 57.5
2.7	Vehicle width	b ₁ (mm / in)	800 31.5
2.8	Ground clearance, laden, below mast	m ₁ (mm / in)	50 2
2.9	Height, mast lowered	h ₁ (mm / in)	1660 65.3
2.10	Lift	h ₃ (mm / in)	4407 173.5
2.11	Height, mast extended	h ₄ (mm / in)	6067 238.8
2.12	Maximum platform height	h ₇ +h ₃ (mm / in)	4600 181.1
2.13	Maximum work height	mm / in	6600 259.8
2.14	Stand height	h ₇ (mm / in)	193 7.6
2.15	Additional lift	h ₉ (mm / in)	400 15.8

Performance

3.1	Turning radius (min)	Wa(mm / in)	800 31.5
3.2	Travel speed, laden / unladen	km/h mph	8 / 8 4.97 / 4.97
3.3	Lift speed, laden / unladen	m/s fps	0.14 / 0.14 0.46 / 0.46
3.4	Lowering speed, laden / unladen	m/s fps	0.16 / 0.16 0.53 / 0.53
3.5	Brake, parking / service		Electromagnetic / Regenerative
3.6	Grade, laden / unladen	%	10 / 10

E-Motor

4.1	Drive motor, output S2 60 min.	kW	1.0 x 2 pcs
4.2	Lift motor, output S3 15%	kW	2.2
4.3	Storage table lift motor power	kW	0.5
4.4	Battery dimensions, maximum	L x W x H (mm / in)	480 x 146 x 500 18.9 x 5.8 x 19.7
4.5	Battery voltage / nominal capacity (LiFePO4)	V/Ah	24/150
4.6	Battery weight, minimum	kg/lb	52 115
4.7	Charger (built-in, optional)	Amp	30*
4.8	Charger (external)	Amp	60

Others

5.1	Type of drive control		PMSM
5.2	Sound pressure level at the driver's seat	dB(A)	69

*25A max with 110V input, 30A max with 120V - 240V input

Get in touch for sales & enquiries

enquiries@noblelift.nz
09 302 0414

Noblelift New Zealand
3/18 Croskery Road
Papakura 2110

NOBLELIFT